



TOP VIEW

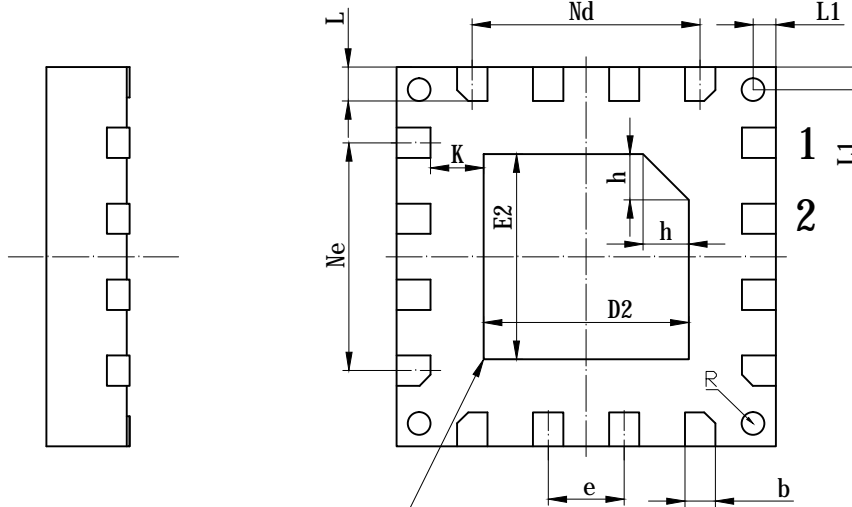

EXPOSED THERMAL
PAD ZONE


BOTTOM VIEW

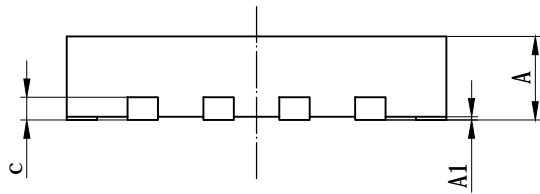

SIDE VIEW

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	0.37	0.40	0.43
A1	0	0.02	0.05
b	0.15	0.20	0.25
c	0.12REF		
D	2.40	2.50	2.60
D2	1.25	1.35	1.45
e	0.50BSC		
Ne	1.50BSC		
Nd	1.50BSC		
E	2.40	2.50	2.60
E2	1.25	1.35	1.45
L	0.175	0.225	0.275
L1	0.10	0.15	0.20
h	0.25	0.30	0.35
R	0.075REF		
K	0.35REF		

.....		
.....		
.....		
.....		
.....		

 HuaTi an Technology (Xi ' an) CO. , LTD			
. <HLS% S&S&SS%			
QFN16L(2. 52. 5X0. 40-0. 50) (A)			
mm		S	
%		%	
